


R-CALCULATION - 50MM LOXO PANEL WITH 22MM UNVENTILATED GAP & R1.8 INSULATION
(NZ application assuming 14% M.C. in LOXO PANEL & construction per below)




GENERAL ARRANGEMENT 2.2

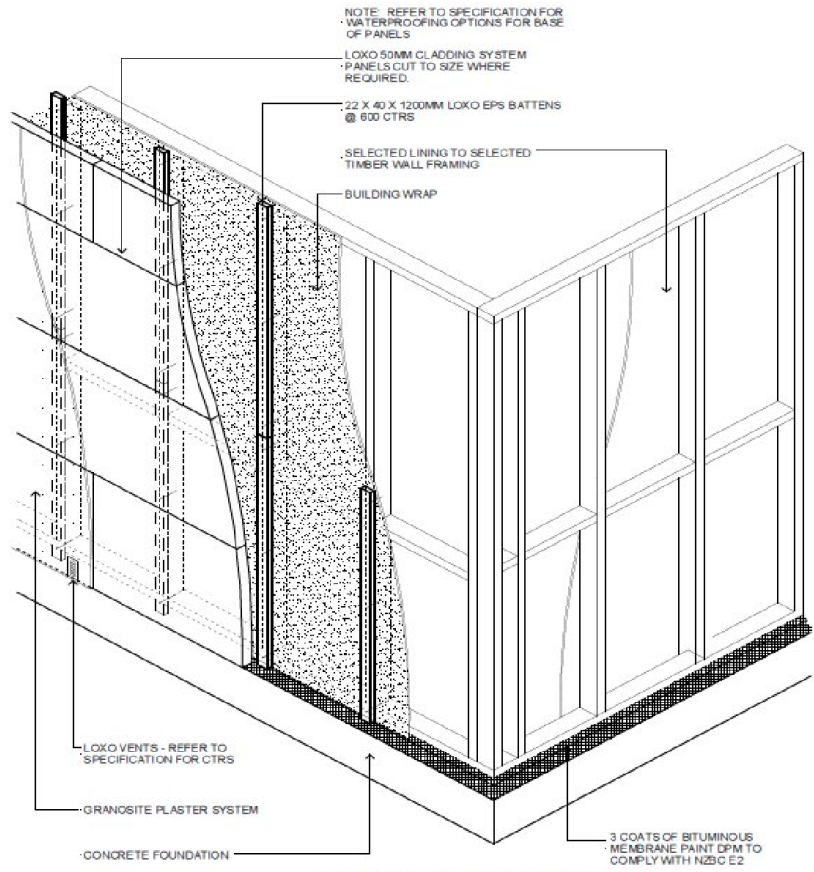

GENERAL ARRANGEMENT
 Det. 2.2.1
 Scale: NTS
 UPDATED AUGUST 2014

2.3 SINGLE STORY SECTION

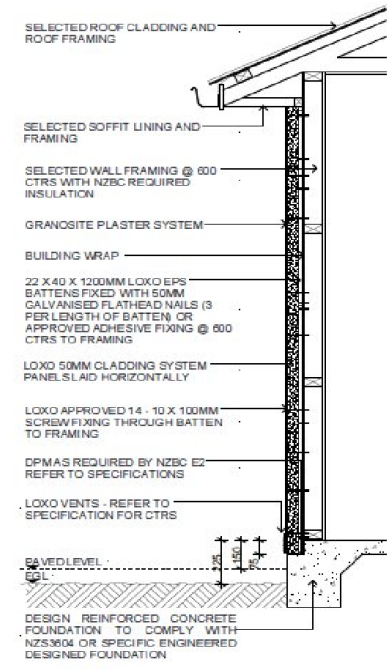

SINGLE STOREY SECTION
22 x 40 x 1200mm CLASSIC BATTEN
 Det. 2.3.1
 Scale: 1:20
 UPDATED AUGUST 2014

THERMAL INSULATION EVALUATION BY CALCULATION

50MM LOXO PANEL WITH 22MM UNVENTILATED GAP & R1.8 INSULATION (a: insulation path)															
Granosite Plaster System, 50mm Loxo Panel, 22mm vented air gap, unreflective building wrap, R1.8 batt insulation (e.g. 90mm 8kg/m3 glasswool), 10mm plasterboard															
JMF Calc	372w06aU	wall thermal element	m ² .K/W	°C out	°C in	°C avg	Δt	m ² .K/W	°C out	°C in	°C avg	Δt	e1	e2	mm
		Outside air film:	0.030	6.00	6.15	6.07	0.15	0.030	30.00	29.92	29.96	0.08	cavity		
		Granosite Plaster System (8mm, k=0.8)	0.010	6.15	6.19	6.17	0.05	0.010	29.92	29.90	29.91	0.03			8
		50mm Loxo Panel (k=0.198 @ 14% M.C.)	0.253	6.19	7.43	6.81	1.23	0.253	29.90	29.26	29.58	0.64			50
		22mm unreflective unvented air gap	0.203	7.43	8.41	7.92	0.99	0.169	29.26	28.83	29.04	0.43	0.87	0.87	22
		unreflective building wrap	0.000	8.41	8.41	8.41	0.00	0.000	28.83	28.83	28.83	0.00			0
		R1.8 batt insulation (e.g. 90mm 8kg/m3 glasswool)	1.825	8.41	17.30	12.86	8.89	1.758	28.83	24.36	26.60	4.46			90
		10mm plasterboard	0.053	17.30	17.56	17.43	0.26	0.053	24.36	24.23	24.30	0.13			10
		Indoor air film (unreflective still air surface):	<u>0.090</u>	17.56	18.00	17.78	<u>0.44</u>	<u>0.090</u>	24.23	24.00	24.11	<u>0.23</u>			
		Total Thermal Resistance, R_{Ti} =	2.46	winter			12.00	2.36	summer			6.00			180
		Corresponding Total Conductance (U _{Ti}):	<u>0.41</u>	W/(m ² .K)				<u>0.42</u>	W/(m ² .K)						
Surface Overall Total Thermal Resistance, R_T=								2.29	winter			2.20	summer (when framing considered)		

NOTES: **Determinations based upon NZS 4214:2006 and AS/NZS 4859.1:2002/Amdt 1 2006.**
 (NZ bounding outdoor temperature conditions of 6°C winter, 30°C summer)

Client Ref: 2015.1
 Version 5/03/2015 15:33

The results are believed representative at the date of calculation, however the author reserves the right to update calculations.

50mm Loxo Panel (k=0.127, 0% M.C.) thermal resistance based on Boqianzhijian (WSW)ZI China, test No.0702074 of Feb 2007 at 30°C, 0% M.C.
Loxo Panel estimated to have k=0.198 @ 14% M.C. i.e. R0.253 for 50mm for above calculations. For 0% MC, add 0.07 to Overall Total R.

90x45mm wood frames @ 600mm centres and dwangs @ 800mm, equates to 86.8% of surface area for insulation.

Insulation R adjusted at 0.65%/K or 0.39%/K in line with AS/NZS 4859.1:2002/Amdt 1, Clause K3.1

Air space insulation values (shown in italics) were estimated using Reflect3 software.

The calculations incorporate the dust assumptions of AS/NZS 4859.1:2002/Amdt 1 2006 - Wall cavity, Clause K3.2 (e+0.0) (no dust on vertical surfaces)



Total R values include indoor and outdoor air films. Total Conductance (U) calculated by U=1/R

This report may not be reproduced except in full. Results may not be quoted without reference to the assumptions.

Calculated by James Fricker, F.AIRAH, M.IEAust, CPEng.

Signed:

James Fricker

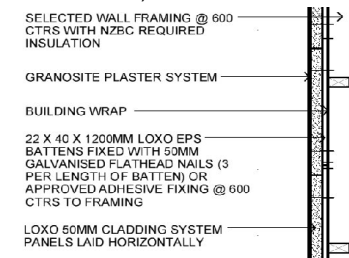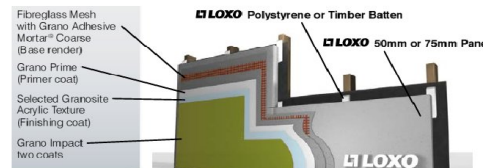

THERMAL INSULATION EVALUATION BY CALCULATION

50MM LOXO PANEL WITH 22MM UNVENTILATED GAP & R1.8 INSULATION (b: frame+EPS batten path)

Granosite Plaster System, 50mm Loxo Panel, 22mm SL Class EPS batten, unreflective building wrap, 90mm deep pine framing (12% MC, k =0.12 W/mK), 10mm plasterboard

JMF Calc

372w06bU	wall thermal element	m ² .K/W	°C out	°C in	°C avg	Δt	m ² .K/W	°C out	°C in	°C avg	Δt	e1	e2	mm
	Outside air film:	0.030	6.00	6.21	6.10	0.21	0.030	30.00	29.90	29.95	0.10	cavity		
	Granosite Plaster System (8mm, k=0.8)	0.010	6.21	6.27	6.24	0.07	0.010	29.90	29.86	29.88	0.03			8
	50mm Loxo Panel (k=0.198 @ 14% M.C.)	0.253	6.27	8.00	7.14	1.73	0.253	29.86	28.98	29.42	0.88			50
	22mm SL Class EPS batten	0.568	8.00	11.89	9.95	3.89	0.530	28.98	27.12	28.05	1.85			22
	unreflective building wrap	0.000	11.89	11.89	11.89	0.00	0.000	27.12	27.12	27.12	0.00			0
	90mm deep pine framing (12% MC, k =0.12 W/mK)	0.750	11.89	17.02	14.46	5.13	0.750	27.12	24.50	25.81	2.62			90
	10mm plasterboard	0.053	17.02	17.38	17.20	0.36	0.053	24.50	24.31	24.41	0.19			10
	Indoor air film (unreflective still air surface):	<u>0.090</u>	17.38	18.00	17.69	<u>0.62</u>	<u>0.090</u>	24.31	24.00	24.16	<u>0.31</u>			
	Total Thermal Resistance, R_{Tf} =	1.75	winter			12.00	1.72	summer			6.00			180
	Corresponding Total Conductance (U _{Tf}):	<u>0.57</u>	W/(m ² .K)				<u>0.58</u>	W/(m ² .K)						

NOTES: **Determinations based upon NZS 4214:2006 and AS/NZS 4859.1:2002/Amdt 1 2006.**

(NZ bounding outdoor temperature conditions of 6°C winter, 30°C summer)

The results are believed representative at the date of calculation, however the author reserves the right to update calculations.

50mm Loxo Panel (k=0.198 @ 14% M.C.) thermal resistance based on Boqianzhijian (WSW)ZI China, test No.0702074 of Feb 2007 at 30°C, 0% M.C.

Loxo Panel estimated to have k=0.198 @ 14% M.C. i.e. R0.253 for 50mm for above calculations.

90x45mm wood frames @ 600mm centres and dwangs @ 800mm, equates to 6.7% of surface area for EPS insulated framing.

Insulation R adjusted at 0.65%/K or 0.39%/K in line with AS/NZS 4859.1:2002/Amdt 1, Clause K3.1

Total R values include indoor and outdoor air films. Total Conductance (U) calculated by U=1/R

This report may not be reproduced except in full. Results may not be quoted without reference to the assumptions.

Calculated by James Fricker, F.AIRAH, M.IEAust, CPEng.

Signed:

James Fricker



Client Ref: 2015.1

Version 5/03/2015 15:33

THERMAL INSULATION EVALUATION BY CALCULATION

50MM LOXO PANEL WITH 22MM UNVENTILATED GAP & R1.8 INSULATION (c: frame+air gap path)															
Granosite Plaster System, 50mm Loxo Panel, 22mm SL Class EPS batten, unreflective building wrap, 90mm deep pine framing (12% MC, k =0.12 W/mK), 10mm plasterboard															
JMF Calc	372w06cU	wall thermal element	m ² .K/W	°C out	°C in	°C avg	Δt	m ² .K/W	°C out	°C in	°C avg	Δt	e1	e2	mm
		Outside air film:	0.030	6.00	6.26	6.13	0.26	0.030	30.00	29.87	29.93	0.13	cavity		
		Granosite Plaster System (8mm, k=0.8)	0.010	6.26	6.35	6.30	0.09	0.010	29.87	29.82	29.85	0.04			8
		50mm Loxo Panel (k=0.198 @ 14% M.C.)	0.253	6.35	8.54	7.44	2.19	0.253	29.82	28.70	29.26	1.12			50
		22mm unreflective unvented air gap	0.198	8.54	10.26	9.40	1.72	0.170	28.70	27.95	28.33	0.75	0.87	0.87	22
		unreflective building wrap	0.000	10.26	10.26	10.26	0.00	0.000	27.95	27.95	27.95	0.00			0
		90mm deep pine framing (12% MC, k =0.12 W/mK)	0.750	10.26	16.76	13.51	6.50	0.750	27.95	24.63	26.29	3.32			90
		10mm plasterboard	0.053	16.76	17.22	16.99	0.46	0.053	24.63	24.40	24.52	0.23			10
		Indoor air film (unreflective still air surface):	<u>0.090</u>	17.22	18.00	17.61	<u>0.78</u>	<u>0.090</u>	24.40	24.00	24.20	<u>0.40</u>			
		Total Thermal Resistance, R_{Tf} =	1.38	winter			12.00	1.36	summer			6.00			180
		Corresponding Total Conductance (U _{Tf}):	<u>0.72</u>	W/(m ² .K)				<u>0.74</u>	W/(m ² .K)						

NOTES: **Determinations based upon NZS 4214:2006 and AS/NZS 4859.1:2002/Amdt 1 2006.**

Client Ref: 2015.1

(NZ bounding outdoor temperature conditions of 6°C winter, 30°C summer)

Version 5/03/2015 15:33

The results are believed representative at the date of calculation, however the author reserves the right to update calculations.

50mm Loxo Panel (k=0.198 @ 14% M.C.) thermal resistance based on Boqianzhijian (WSW)ZI China, test No.0702074 of Feb 2007 at 30°C, 0% M.C.

Loxo Panel estimated to have k=0.198 @ 14% M.C. i.e. R0.253 for 50mm for above calculations.

90x45mm wood frames @ 600mm centres and dwangs @ 800mm, equates to 6.5% of surface area for uninsulated framing.

Insulation R adjusted at 0.65%/K or 0.39%/K in line with AS/NZS 4859.1:2002/Amdt 1, Clause K3.1

Air space insulation values (shown in italics) were estimated using Reflect3 software.

The calculations incorporate the dust assumptions of AS/NZS 4859.1:2002/Amdt 1 2006 - Wall cavity, Clause K3.2 (e+0.0) (no dust on vertical surfaces)

Total R values include indoor and outdoor air films. Total Conductance (U) calculated by U=1/R

This report may not be reproduced except in full. Results may not be quoted without reference to the assumptions.

Calculated by James Fricker, F.AIRAH, M.IEAust, CPEng.

Signed:

James Fricker

